

AD/A-002 922

A NOTE ON ADMISSIBLE EXCHANGES IN
SPANNING TREES

Fred Glover, et al

Texas University at Austin

Prepared for:

Colorado University
Office of Naval Research

April 1974

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE

Unclassified

Security Classification

AD/A-002922

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

| | | | |
|--|--|---|-----------------------|
| 1. ORIGINATING ACTIVITY (Corporate author) Center for Cybernetic Studies The University of Texas | | 2a. REPORT SECURITY CLASSIFICATION Unclassified | |
| | | 2b. GROUP | |
| 3. REPORT TITLE A Note on Admissible Exchanges in Spanning Trees | | | |
| 4. DESCRIPTIVE NOTES (Type of report and inclusive dates) | | | |
| 5. AUTHOR(S) (First name, middle initial, last name) Fred Glover Darwin Klingman | | | |
| 6. REPORT DATE April 1974 | | 7a. TOTAL NO. OF PAGES 7 | 7b. NO. OF REFS 13 |
| 8a. CONTRACT OR GRANT NO. N00014-67-A-0126-0008; 0009 | | 9a. ORIGINATOR'S REPORT NUMBER(S) Center for Cybernetic Studies Research Report CCS 181 | |
| b. PROJECT NO NR 047-021 | | 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) | |
| c. | | | |
| d. | | | |
| 10. DISTRIBUTION STATEMENT This document has been approved for public release and sale; its distribution is unlimited. | | | |
| 11. SUPPLEMENTARY NOTES Reproduced from best available copy. | | 12. SPONSORING MILITARY ACTIVITY Office of Naval Research (Code 434) Washington, D.C. | |
| 13. ABSTRACT A constructive result is given for identifying a complete "pairing" (one-one matching) of edges from two spanning trees such that each pair gives rise to an admissible exchange relative to the first tree. The result is considerable stronger than the standard result concerning the existence of admissible exchanges in spanning trees, and finds application in establishing the validity of "swapping" algorithms for problems in undirected graphs. | | | |

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. Department of Commerce
Springfield, VA. 22151

DD FORM 1473

1 NOV 65

(PAGE 1)

S/N 0101-807-6811

Unclassified

Security Classification

A-31400

Security Classification

DD FORM 1473 (BACK)
1 NOV 68
S/N 0102-014-6800

Security Classification

A-31409

ABSTRACT


A constructive result is given for identifying a complete "pairing" (one-one matching) of edges from two spanning trees such that each pair gives rise to an admissible exchange relative to the first tree. The result is considerable stronger than the standard result concerning the existence of admissible exchanges in spanning trees, and finds application in establishing the validity of "swapping" algorithms for problems in undirected graphs.

A NOTE ON
ADMISSIBLE EXCHANGES
IN SPANNING TREES

by

Fred Glover*
Darwin Klingman

April, 1974

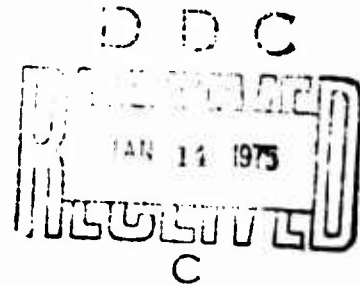

*Professor, University of Colorado

This research was partly supported by Project No. NR 047-021, ONR Contracts N00014-67-A-0126-0008 and N00014-67-A-0126-0009 with the Center for Cybernetic Studies, The University of Texas. Reproduction in whole or in part is permitted for any purpose of the United States Government.

CENTER FOR CYBERNETIC STUDIES

A. Charnes, Director
Business-Economics Building, 512
The University of Texas
Austin, Texas 78712
(512) 471-1821
(512) 471-4894



1.

Spanning trees appear in numerous guises and applications throughout graph theory, ranging from the minimum spanning tree problem [1, 8, 9, 10, 13] to the network "basis structures" of linear programming whose exploitation has resulted in efficient algorithms for minimum cost flow problems [2, 3, 7, 12]. Spanning trees have also recently been shown to have relevance for solving traveling salesman problems [5,6].

Uses of spanning trees are frequently based on "swaps" involving the deletion of an "in-tree" edge and the addition of an "out-of-tree" edge, such that the result is also a spanning tree. This type of swap, which we will call an admissible exchange, corresponds precisely to a linear programming basis exchange step (i.e., "pivot operation") in a network. Thus, it is well known (and immediately apparent), for example, that given any two distinct spanning trees, T and T' , one can always select any edge of T that is not in T' , and thereupon find some edge of T' not in T , so that swapping these edges (deleting the first and adding the second) will give an admissible exchange relative to T .

The purpose of this note is to establish a considerably stronger result, concerning the ability to "pair" all edges of $T - T'$ with all edges of $T' - T$ (treating these trees as edge sets) so that each pair gives an admissible exchange relative to T . Furthermore, we will provide a constructive procedure in the proof of this result for identifying precisely such a pairing.

Letting $T'(e)$ denote the unique edge-simple path in T' joining the endpoints of the edge e (or alternatively, the collection of edges on this path) we make the following preliminary observation.

Lemma: Let e_1, \dots, e_k be any k edges of $T - T'$. Then the union of $T'(e_1), \dots, T'(e_k)$ contains at least k distinct edges of $T' - T$.

Proof: The union of $T'(e_i)$, $i = 1, \dots, k$ is a forest in T' . The endpoints of each edge e_i lie in exactly one tree of this forest. Now add the edges e_1, \dots, e_k to this forest and delete all edges of $T' - T$. The result is a subgraph of T . If the forest contains fewer than k edges of $T' - T$ to be deleted, then a cycle is introduced in at least one tree of this forest by adding e_1, \dots, e_k . Since T has no cycles, this is impossible, completing the proof.

Note that the sets $T'(e_i)$ in the foregoing lemma can be also replaced with the sets $T^*(e_i) = T'(e_i) - T$. Utilizing this lemma, we now establish the following result.

Theorem: There is a one-one pairing (matching) of the edges of $T - T'$ with the edges of $T' - T$ so that each pair gives rise to an admissible exchange in T .

Proof: We establish the theorem by a constructive process that generates the desired pairing.* Assume that the edges in a subset E of $T - T'$ have been paired with the edges in a subset E' of $T' - T$. Select any edge $e_0 \in (T - T') - E$. Let $U_0 = \emptyset$, and for $i \geq 1$ define $V_i =$ the union of $T^*(e_0)$ with all sets $T^*(e)$ such that $e \in U_{i-1}$, and define $U_i = \{e \in E: e \text{ pairs with some } e' \in V_i\}$. As long as $V_i \not\subseteq E'$ we have $|U_i| = |V_i| \geq |U_{i-1}| + 1$, where the inequality follows from the definition of V_i in terms of U_{i-1} and the lemma. Thus there must be a finite least k such that $V_k \subseteq E'$. Identify any $e'_k \in V_k - E'$, and for each $i < k$ identify e_i such that $e_i \in U_i \cup \{e_0\}$ and $e'_{i+1} \in T^*(e_i)$, and identify e'_i such that e'_i currently pairs with e_i . It follows that the pairing $(e_0, e'_1), (e_1, e'_2), \dots, (e_{k-1}, e'_k)$, with all other pairs in E and E' unchanged, creates a 1-1 correspondence of the edges in $E \cup \{e_0\}$ and $E' \cup \{e'_k\}$.

*We are indebted to Hal Gabow for pointing out that a nonconstructive proof of the theorem can be based on applying Hall's theorem for distinct set representatives to the foregoing lemma (see, e.g., [4a]p.53).

The ability to identify and construct the one-one matching of the theorem in the manner indicated is a useful tool for characterizing various types of optimality criteria involving spanning trees. If, for example, one seeks to minimize $F(T)$, where T is a spanning tree, then the theorem establishes the validity of an algorithm that utilized sequential admissible exchanges, all of which are "improving," provided the difference $F(T) - F(T')$ can be expressed in terms of an appropriate function of the edges of $T - T'$ and of $T' - T$. We shall not attempt to fully specify the conditions of an "appropriate function," which can be of a highly complex character, but note that the objective function evaluation for feasible linear programming bases falls in the proper category. As demonstrated in [4], the theorem is also useful for establishing optimality conditions in certain problems where not all improving moves can be restricted to single admissible exchanges.

4

References

1. Dijkstra, E.W., "A Note on Two Problems in Connexion with Graphs," Numerische Mathematik 1, 269-271, 1959.
2. Glover, Fred, D. Karney, and D. Klingman, "The Augmented Predecessor Index Method for Locating Stepping Stone Paths and Assigning Dual Prices in Distribution Problems," Transportation Science 6, 171-180, 1972.
3. Glover, Fred, D. Karney, D. Klingman, and A. Napier, "A Computational Study on Start Procedures, Basis Change Criteria, and Solution Algorithms for Transportation Problems," Management Science 20, 5, 793-814, 1974.
4. Glover, Fred, and D. Klingman, "Finding Minimum Spanning Trees With a Fixed Number of Links at a Node," To Appear.
- 4a. Harary, Frank, Graph Theory, Addison-Wesley, Reading, Massachusetts 1969.
5. Held, M. and R.M. Karp, "The Traveling Salesman Problem and Minimum Spanning Trees," Operations Research 18, 6, 1138-1162, November-December 1970.
6. Held, M. and R.M. Karp, "The Traveling Salesman Problem and Minimum Spanning Trees: Part II," Mathematical Programming 1, 1, 6-25, October 1971.
7. Johnson, Ellis, "Networks and Basic Solutions," Operations Research 14, 4, 619-623, 1966.
8. Hillier, F.S. and G. J. Lieberman, Introduction to Operations Research San Francisco, California: Holden-Day, Inc., 1967.
9. Kershenbaum, J. and R. Van Slyke, "Computing Minimum Trees," Proc. ACM Annual Conference, 518, 1972.
10. Kruskal, J.B., Jr., "On the Shortest Spanning Subtree of Graph and the Traveling Salesman Problem," Proc. Am. Math. Soc. 7, 48-50, 1972.
11. Rosenstiehl, P., "L'Arbre Minimum d'un Graphe," Proc. Int'l. Symposium on the Theory of Graphs in Rome 1966, Dunod/Gordon-Breach, 1967.
12. Srinivasan, V. and G. L. Thompson, "Accelerated Algorithms for Labeling and Relabeling of Trees with Application for Distribution Problems," Journal of the Association for Computing Machinery 19, 4, 712-726, October 1972.
13. Wagner, H.M., Principles of Operations Research, Prentice-Hall, Englewood Cliffs, N.J., 1969.